


# ASDISPLAY OVERVIEW

BMPRO's ASDisplay is an information display designed to show up-to-date information about your battery when connected to BMPRO's ASPower battery management system.

The ASDisplay displays battery levels, battery charging information and water tank levels from any connected water tank sensors. It allows you to turn tank pumps on or off and features and ECO Mode setting to turn off almost all outputs on the ASPower.

Together, the ASDisplay and the ASPower make up BMPRO's ASPero system.

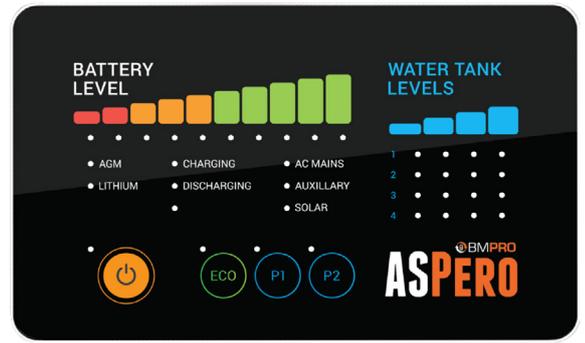

## KEY FEATURES

- Up-to-date information display showing battery level, water tank levels, battery chemistry, battery charge/discharge status and power source
- Lithium LiFePO4 compatibility
- Pump control
- ECO Mode
- Battery capacity configuration
- Battery chemistry configuration
- BMPRO signature durability & ease of use
- 2 year warranty

## OPTIONAL ADD-ONS

To get the most of your ASDisplay it may be used with the following products (sold separately) from the BMPRO range:

### BC300 + CommLink

External Shunt for integration of additional accessories and high current loads such as inverters.

### Dipper

Water level indicators for water tanks.

ASDISPLAY SPECIFICATIONS	
Input Voltage Range	10-16V
Operating Temperature	10°C to 50°C
Storage Temperature	-10°C to 70°C
Humidity	90% non-condensing
Battery Drain (when inactive)	<15mA
Dimensions	150.4mm x 90.4mm x 15mm

## QR CODES



Manual



Install Guide



Product Page



FAQs



YouTube

# ASDISPLAY WIRING DIAGRAM

