


RVView2 INSTALL GUIDE


The RVView2 is a wall-mounted battery monitor designed specifically to operate with BMPRO's BatteryPlus35. The RVView2 connects to the BatteryPlus35 via the data cable. The monitor gives you vital up-to-the-minute data about your caravan's current status using a clear back-lit display. The display shows volts and amps, battery charge and discharge status, as well as the source input for the vehicle's 12V system.

1. DESCRIPTION OF PARTS

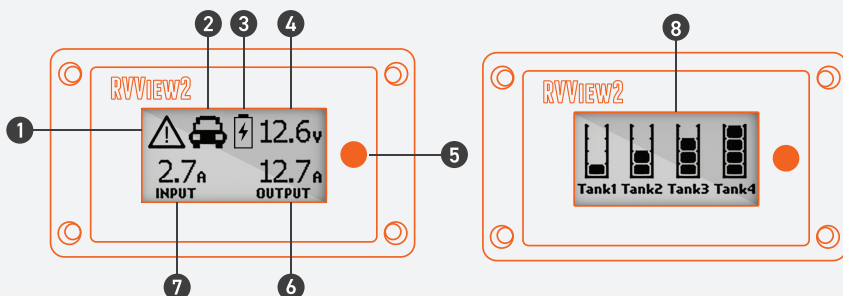

1. Warning Indicator
2. Power Source Indicator
3. Battery Status Indicator
4. System Voltage
5. Backlight / Screen Change Button
6. Output Current
7. Input Current
8. Tanks


2. MOUNTING

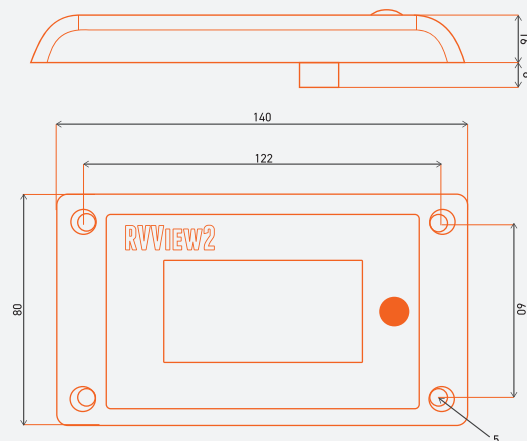

To mount the RVView2:

1. Drill holes in the wall for the connectors.
2. Use flat head screws with a maximum diameter of 5.0mm to mount the RVView2 to the wall.
3. Fix the RVView2 to the wall.
4. Make all connections at the rear of the RVView2.

3. WIRING

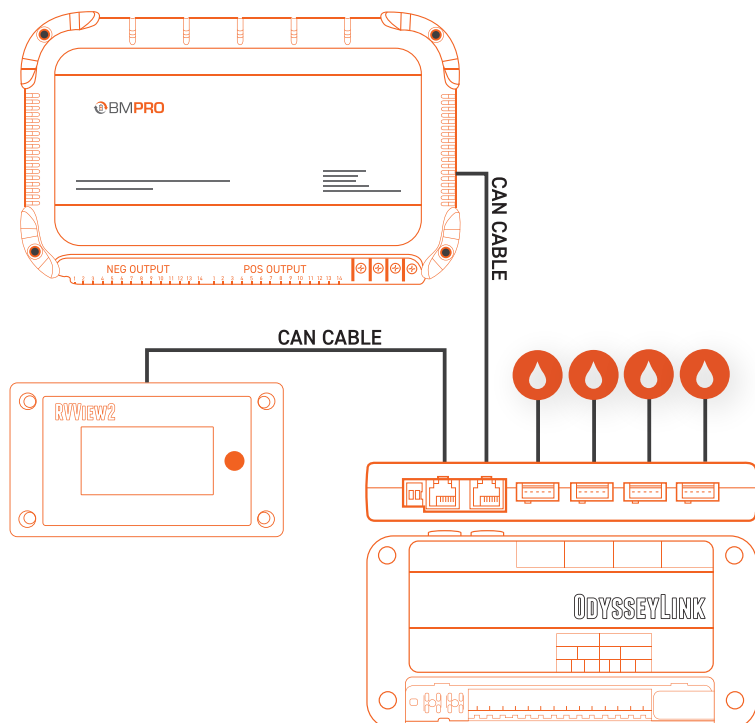


4. LITHIUM PROGRAMMING USING AN ODYSSEYLINK104

The RVView2 cannot change the battery configuration of a BatteryPlus35 to lithium. You must use an OdysseyLink104 and the Odyssey app:

1. In the top right corner in the Home Screen, press the Settings button.
2. Scroll down to Battery Profile.
3. Select LiFePO4.

OPTIONAL ADD-ONS

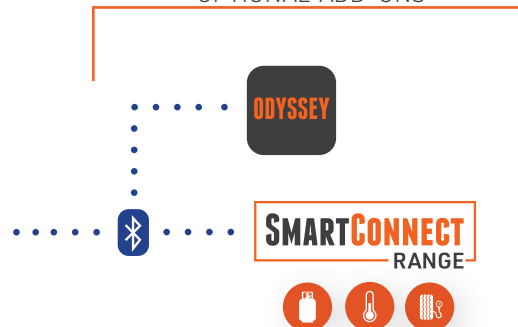

MANUAL



DATASHEET



PRODUCT PAGE