RVVIEW2 OVERVIEW

BMPRO's RVView2 is a wall-mounted 12V battery monitor designed to operate with BMPRO's BatteryPlus35-II series of battery management systems.

The RVView2 provides information about battery voltage, input/output current, input source, battery indication and warnings.

The RVView2 also allows the monitoring of water levels of up to four connected tanks.

With the OdysseyLink104, it can be integrated into the Odyssey system and monitored using BMPRO's free Odyssey App.



RVVIEW2 SPECIFICATIONS

Visual Warning	Indicator displayed if BatteryPlus35-II short circuit is detected
Water Monitoring	Dipper or tank bungs
Monitored Battery Capacity	50 - 600Ah
Input Voltage Range	6 - 16V
Battery Drain	< 22mA with backlight off
Ambient Temperature	0 - 50°C
Dimensions	140mm x 80mm x 15.5mm

KEY FEATURES

- Battery voltage display
- Charging/discharging current display
- Active power source display
- Water tank level display
- BMPRO signature durability & ease of use
- 2 year warranty

QR CODES



Manual



Install Guide



Product Page



FAQs






Datasheet

YouTube



19 Henderson Rd, Knoxfield VIC 3180 Australia customerservice@teambmpro.com

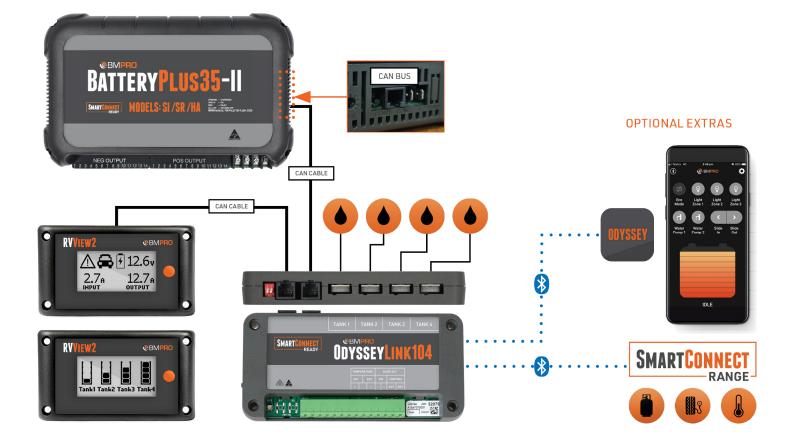



19 Henderson Rd, Knoxfield VIC 3180 Australia customerservice@teambmpro.com