POWERING YOUR ADVENTURES

# CHARGEMONITORMAX

## PREMIUM 500A BATTERY MONITOR

The ChargeMonitorMax is a wired device designed to monitor and display your battery performance using real-time data, allowing you to effectively track your battery's remaining energy through an intuitive display.

Compatible with a variety of standard lead-acid and LiFePO4 lithium batteries, the ChargeMonitorMax can be used to instantly view volts, amps, state of charge, and remaining battery capacity, making it ideal for devices like microwaves, inverters, and hair dryers.

The ChargeMonitorMax will ensure you always have enough power for your high-current devices and keep your adventures on track!

Note: The ChargeMonitorMax is not suitable for engine cranking applications of any type and is not designed for under-vehicle bonnet use.

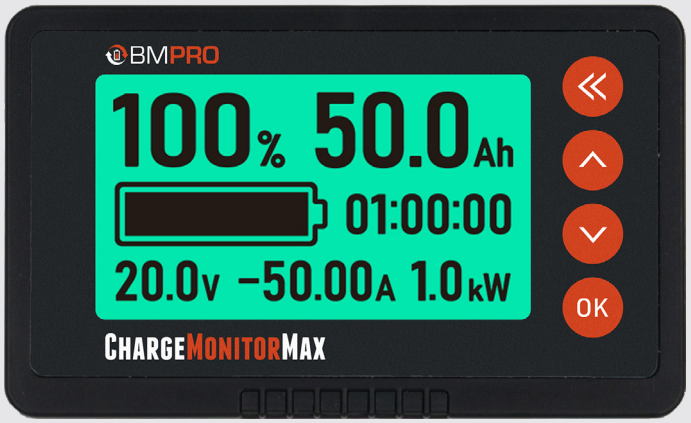

## SPECIFICATIONS

| | |
|---|---|
| Working Voltage | 10-120V |
| Voltage Accuracy | ±1% |
| Current Accuracy | ±1% |
| Capacity Accuracy | ±1% |
| Backlight on Current (>50A) | 100mA |
| Present Capacity Value | 0.1-9999Ah |
| Temperature Range | -10 - 60°C |
| Weight (LCD Interface) | 75g |
| Size (LCD Interface) | 99x61x18mm |
| Shielded Wire Length | 6m |
| B+ Wire Length | 1m |

Last updated 2025-08-28

## KEY FEATURES

- **Real-time monitoring**
  Instantly view volts, amps, time remaining, battery temperature, battery status, and state of charge.
- **User-friendly display**
  All battery data displayed on one screen to ensure quick and easy monitoring.
- **Measure up to 500A peak current in and out of the battery**
  Ideal for operating high-current devices.
- **Supports deep cycle lead-acid, AGM, Gel and LiFePO4 batteries**
- **Easy DIY installation**
- **Monitor several batteries in parallel**

BMPRO TEAM BMPRO .COM
customerservice@teambmpro.com